

Data sheet


LAVITA



Technical data

Nominal heat output	[kW]	10
Partial heat output	[kW]	5
Fresh air demand	[m³/h]	26
Room heating capacity (depending on house insulation)	[m³]	120 - 260
Fuel consumption	[kg/h]	1,4 - 2,8
Efficiency	[%]	86
Energy efficiency class		A+
Chimney draft requirement	[Pa]	12

Characteristics



Balanced flue




RLS system



Energy
efficiency

Dimensions, weight and connection

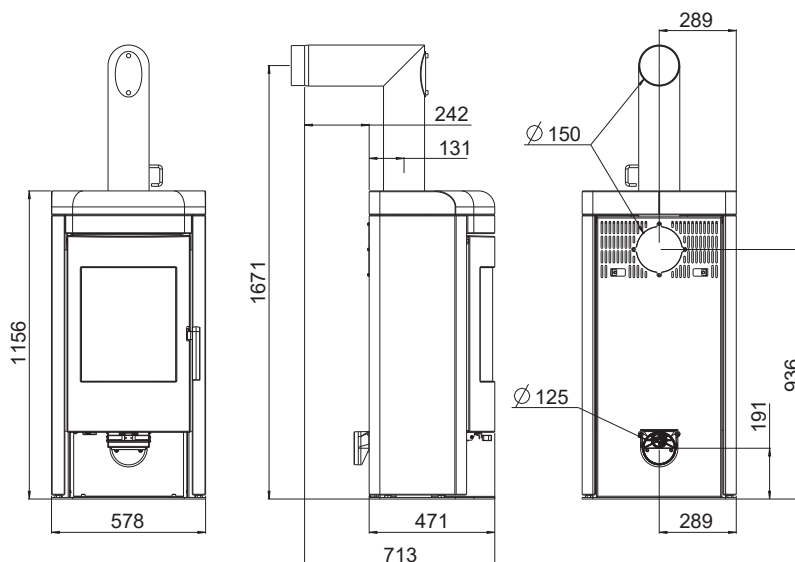

Dimensions

Height	[mm]	1156
Width	[mm]	578
Corpus depth	[mm]	471
Firing chamber [WxHxD]	[mm]	400x350x320

Weight

Weight without stones	[kg]	~165
Weight with stones	[kg]	~300
Thermal mass	[kg]	~150

Flue pipe connection

Flue pipe outlet	[mm]	150
Original angle pipe connection height	[mm]	1671
Original angle pipe total depth	[mm]	713
Original angle pipe distance to rear wall	[mm]	242
Deapth from rear wall to middle of flue pipe	[mm]	131
Original angle pipe side distance	[mm]	289
Rear connection height	[mm]	936
Rear connection side distance	[mm]	289

Fresh air connection

Diameter	[mm]	125
Connection height	[mm]	191
Side distance	[mm]	289

Safety distances

Note

1. To non-combustible objects
a > 40 cm b > 10 cm
2. To combustible objects and reinforced concrete load-bearing walls
a > 80 cm b > 20 cm

